


i-SCAN 3e Features Overview



i-SCAN 3e Hardware Features




8" IPS LCD Touch Screen

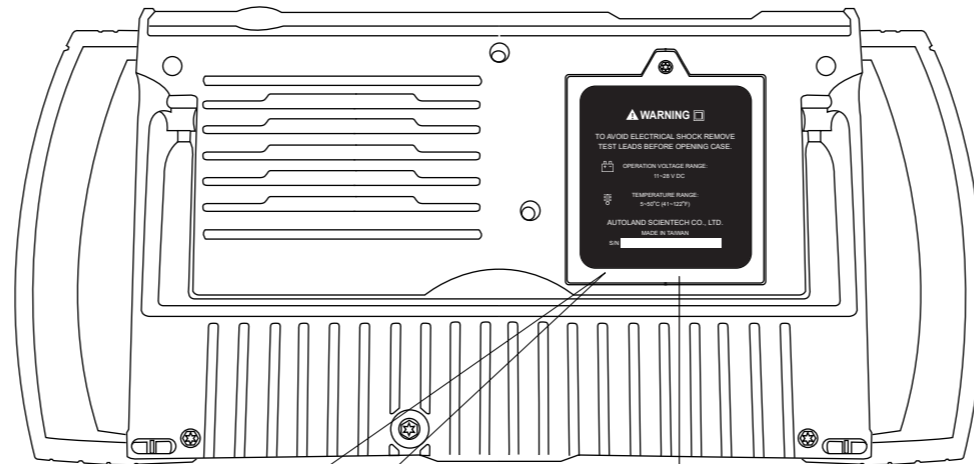

CR2032 PCB Battery
For Perpetual Calendar

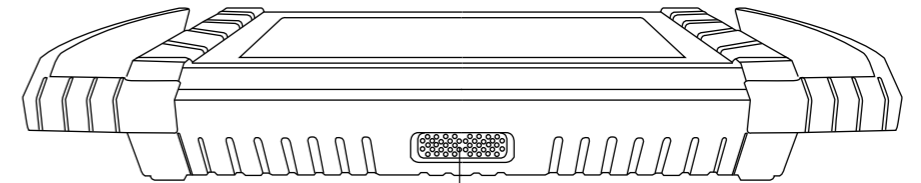

Speaker

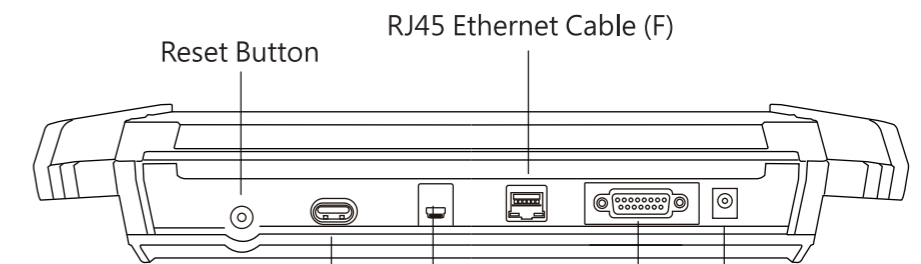

Reset Button

RJ45 Ethernet Cable (F)

USB Port (Master)

USB Port (Slave)

12 ~24V DC Input
15-PIN Diagnostic Adaptor

i-SCAN 3e Basic Functions



Vehicle Diagnostic

Package includes diagnostic, setting, programming and coding functions for Asian Cars, European Cars, US Cars, Australian Car, Supercars, and Trucks.



Technical Hotline (THL)

Through remote control software, distributors or tech-support team can remotely operate i-SCAN 3e and perform necessary functions.



Setting

For basic system setting and i-SCAN 3e system information.



J2534

Supports J2534 interface standards to work with vehicle OBDII systems.



IMS2

IMS2 : patented since 2007
Interface Module Simulation System
for working with OEM software.



Support On Demand (SOD)

SOD offers capability for distributors or tech-support team to remotely utilizing licensed OEM software to perform diagnostic, programming, coding, or repair guide.



Software Update

Connect i-SCAN 3e to Internet then select [UPDATE], system will detect if new software updates are available.


★ The application software is mainly based on the actual purchase.

AUTOLAND[®]
SCIENTECH


i-SCAN 3e Features Overview

Software Download & Update

Power the scanner by using the DC-12V adapter

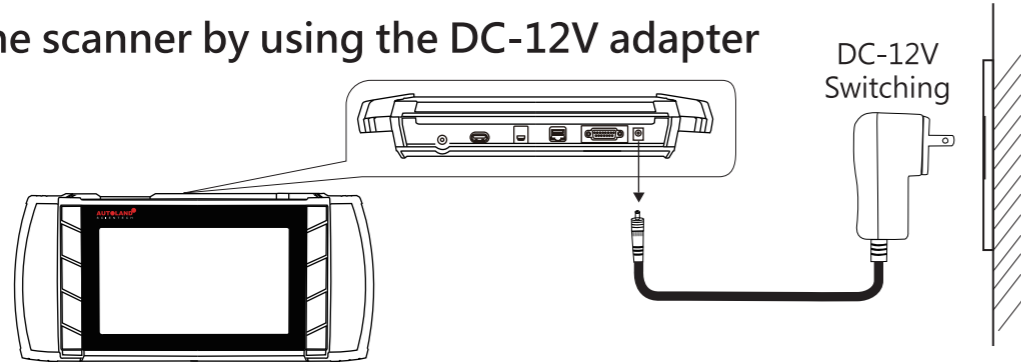


Software Update

1. Select SET UP , then select WiFi connection.
2. After Internet connection is complete, select UPDATE at main page.



3. Entering Software Update, select [Update All] or select [Update] individually.

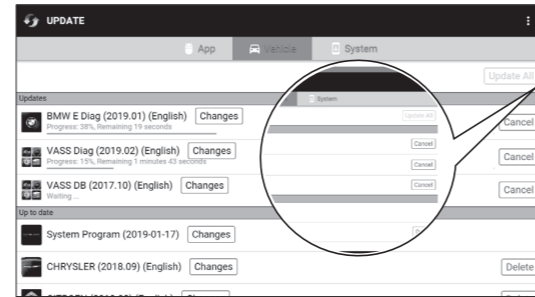


Quick Operational Guide

Step 1 Locate Vehicle Diagnostic Connector

For most vehicles, OBDII connector is located by the driver's seat under the dashboard. Some models may have a lid covering the connector.


Attention:

1. Vehicles manufactured before year of 2000 may be equipped with different connector, or require different connector for different systems. Ex. Toyota before year of 2000 installed the non-OBDII connector under engine hood.
2. Please use correct diagnostic adaptor to connect with vehicle, otherwise connection may fail.

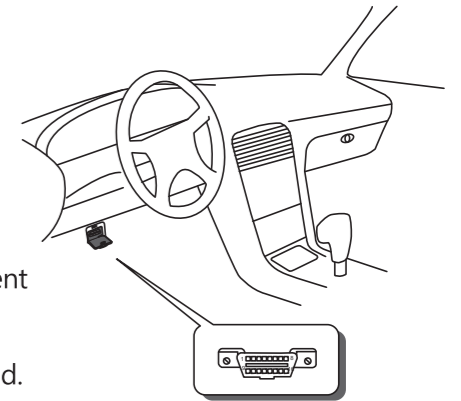


Step 2 Select Diagnostic Adaptor and Connection

1. Connect i-SCAN 3e to vehicle connector via AC-EC5 and corresponding adaptor.
2. After i-SCAN 3e powered on and ready, select [Diagnosis], then select vehicle make.

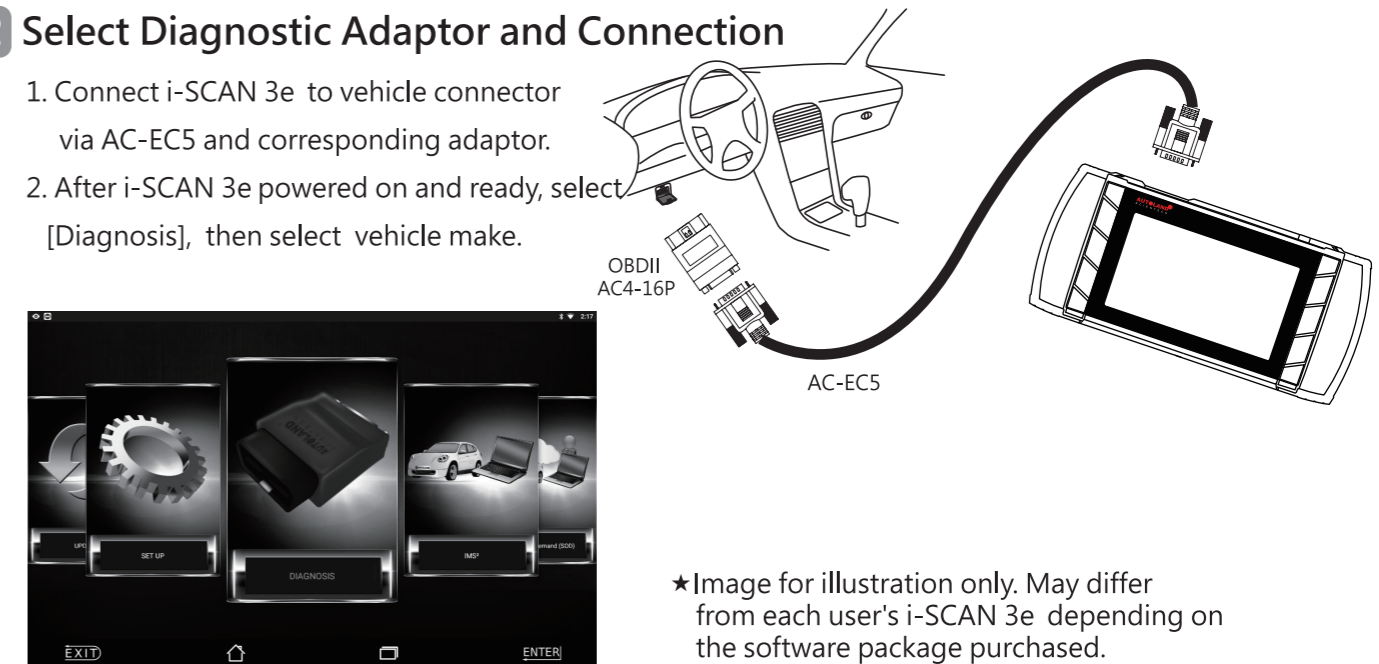


★ Image for illustration only. May differ from each user's i-SCAN 3e depending on the software package purchased.

Printing Function: Using WiFi Printer

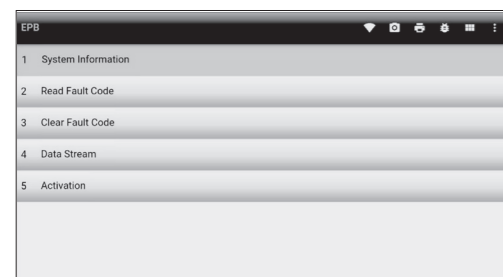


1. Setup WiFi printer network connection. Please consult owner's manual for printer.
2. Connect i-SCAN 3e to the same network as the WiFi Printer.

★ Please refer to i-SCAN 3e and printer owner's manual for detail.

3. Click printer icon  in tool bar on the top of screen.
4. Page preview on screen. Select designated printer from the top left selection area to perform printing.



Fault Code Repair Guide

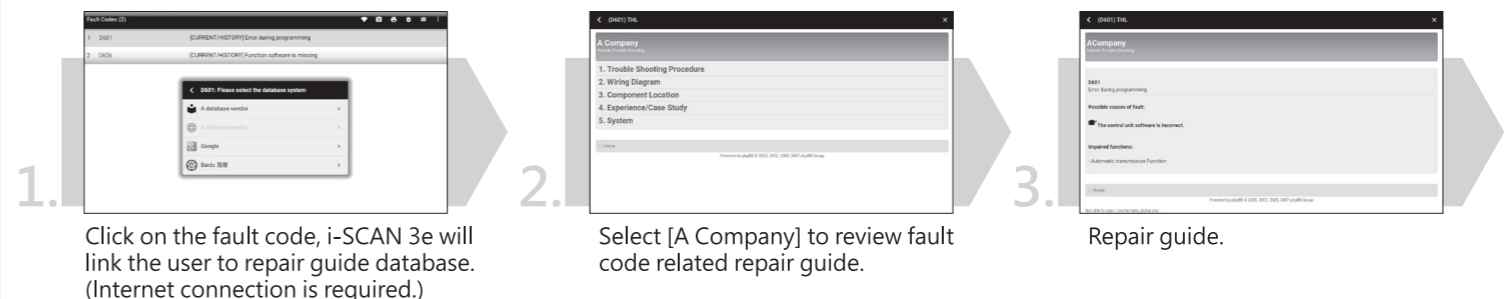

1. Click on the fault code, i-SCAN 3e will link the user to repair guide database. (Internet connection is required.)

2. Select [A Company] to review fault code related repair guide.

3. Repair guide.